



Consolidation of Performance and Workload Models in Evolving Cloud Application Topologies

Santiago Gómez Sáez, Vasilios Andrikopoulos, Frank Leymann

Institute of Architecture of Application Systems, University of Stuttgart, Germany,
{gomez-saez, andrikopoulos, leymann}@iaas.uni-stuttgart.de

BIBTEX

```
@inproceedings {INPROC-2016-01,  
  author = {Santiago Gómez Sáez and Vasilios Andrikopoulos and Frank Leymann},  
  title = {{Consolidation of Performance and Workload Models in Evolving Cloud Application Topologies}},  
  booktitle = {Proceedings of the 6th International Conference on Cloud Computing and Service Science  
(CLOSER 2016)},  
  address = {Rome, Italy},  
  publisher = {SciTePress},  
  institution = {University of Stuttgart, Faculty of Computer Science, Electrical Engineering, and Information  
Technology, Germany},  
  pages = {160--169},  
  type = {Conference Paper},  
  month = {April},  
  year = {2016},  
  language = {English},  
  cr-category = {C.2.4 Distributed Systems,  
    D.2.8 Software Engineering Metrics,  
    D.2.11 Software Engineering Software Architectures},  
  contact = {Santiago Gómez Sáez: santiago.gomez-saez@iaas.uni-stuttgart.de},  
  department = {University of Stuttgart, Institute of Architecture of Application Systems},  
}
```

These publication and contributions were presented at CLOSER 2016
CLOSER 2016 Web site: <http://closer.scitevents.org>

© 2016 SciTePress. Personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution to servers or lists, or to reuse any copyrighted component of this work in other works must be obtained from the SciTePress.



Consolidation of Performance and Workload Models in Evolving Cloud Application Topologies

Santiago Gómez Sáez, Vasilios Andrikopoulos, Frank Leymann

Institute of Architecture of Application Systems, University of Stuttgart, Stuttgart, Germany
{gomez-saez, andrikopoulos, leymann}@iaas.uni-stuttgart.de

Keywords:

Cloud Application Topology; Cloud Application Distribution; Cloud Application Performance Engineering; Cloud Application Workload

Abstract:

The increase of available Cloud services and providers has contributed to accelerate the development and has broadened the possibilities for building and provisioning Cloud applications in heterogeneous Cloud environments. The necessity for satisfying business and operational requirements in an agile and rapid manner has created the need for adapting traditional methods and tooling support for building and provisioning Cloud applications. Focusing on the application's performance and its evolution, we observe a lack of support for specifying, capturing, analyzing, and reasoning on the impact of using different Cloud services and configurations. This paper bridges such a gap by proposing the conceptual and tooling support to enhance Cloud application topology models to capture and analyze the evolution of the application's performance. The tooling support is built upon an existing modeling environment, which is subsequently evaluated using the MediaWiki (Wikipedia) application and its realistic workload.

1 INTRODUCTION

The existence of a wide technological landscape offered in the *Everything-as-a-Service* (*aaS) model has contributed to an increase of applications partially or completely running or built in the Cloud, potentially as a composition of Cloud services [Andrikopoulos et al., 2013]. The adoption of continuous software delivery models, such as DevOps, aim at offering flexibility and agility for a quick response to market changes. The DevOps emergence boosted efforts in research and industry towards developing concepts and tools to assist application developers to develop, provision, and (re)deploy cloud applications in a simplified, interoperable, and agile manner.

Standards like TOSCA¹ allow the automated and interoperable provisioning and configuration of Cloud services to host the different application components. However, there exists a lack of native

support for assisting application developers in the selection and configuration of appropriate Cloud services based on a set of business and operational objectives. When focusing on the performance of the application, such an analysis becomes even more complex and wider, as (i) the fluctuation of the application workload has an impact on the resources demand and QoS, and (ii) the existence of multiple applications running on the same physical environment of a provider has an unpredictable impact on the offered performance [Gómez Sáez et al., 2015]. Towards narrowing such a gap, in [Gómez Sáez et al., 2014] we proposed a process-based approach aimed at *assisting application developers to efficiently (re)distribute their application components spanning multiple Cloud offerings while focusing on fluctuating and evolving workloads and performance demands*. This work materializes the vision described in [Gómez Sáez et al., 2014] by developing the concepts for consolidating performance aspects in Cloud application topologies. The main contributions of this work are:

1. the derivation of a life cycle targeting the specification, analysis, and adaptation of Cloud

¹Topology and Orchestration Specification for Cloud Applications (TOSCA) Version 1.0: <http://docs.oasis-open.org/tosca/TOSCA/v1.0/TOSCA-v1.0.html>

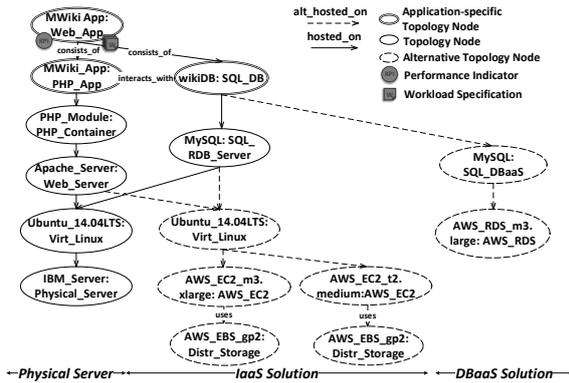


Figure 1: MediaWiki Application Topology Model

applications for evolving workloads and performance requirements,

2. the development of the foundations to enrich Cloud application topology models with evolving business and operational requirements, and workload behavioral models,
3. its corresponding tooling support built atop the TOSCA² and OpenTOSCA³ specification and ecosystem, respectively, and
4. the evaluation of the proposed approach using the well known MediaWiki⁴ application and its realistic workload.

The remainder of the paper is structured as follows. Section 2 presents the background this work builds upon. The proposed life cycle for application (re)distribution, and the meta-models for enriching Cloud application topologies with evolving performance and workload models are presented in Section 3. The tooling support is presented in Section 4, which is then evaluated in Section 5. Section 6 presents related works, and Section 7 conclusions and future work.

2 MOTIVATION & BACKGROUND

Figure 1 depicts multiple viable distributions of the two-tiered PHP-based MediaWiki⁵ applica-

²TOSCA: <http://docs.oasis-open.org/tosca/TOSCA/v1.0/os/TOSCA-v1.0-os.html>

³OpenTOSCA: <http://www.iaas.uni-stuttgart.de/OpenTOSCA/>

⁴MediaWiki Application: <https://www.mediawiki.org/wiki/MediaWiki>

⁵WikiMedia Foundation: <https://wikimediafoundation.org/wiki/Home>

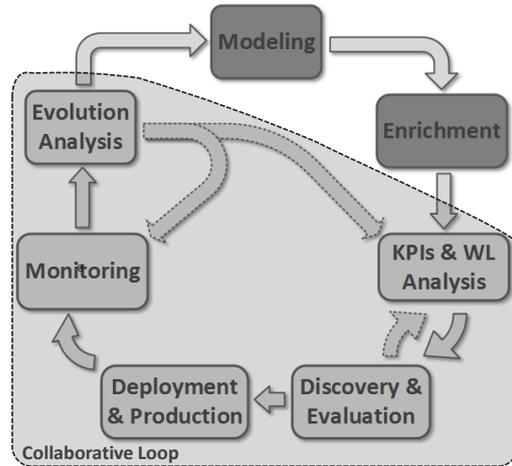


Figure 2: Performance Aware Cloud Application (Re)Distribution Process [Gómez Sáez, 2014]

tion. The MediaWiki topology breaks the application stack in two main component groups: (i) application specific components, i.e. each application tier description, and (ii) the application independent sub-topology/ies (i.e. the α - and γ -topologies in the terminology of [Andrikopoulos et al., 2014a], respectively). The available number and nature of Cloud offerings allows for a partial or complete distribution of the application components, therefore building a wide spectrum of alternative μ -topologies [Andrikopoulos et al., 2014a]. For instance, it is possible to outsource the MediaWiki front-end tier to a VM-based offering, such as Amazon EC2⁶, and migrate its backend database tier to an off-premise EC2 VM or in an Amazon RDS⁷ database instance.

The existence of such a spectrum of alternative μ -topologies together with the necessity to rapidly satisfy changing business and operational requirements introduces a multi-dimensional problem involving the analysis and revision of requirements and objectives. More specifically, it involves the evaluation of the trade-off between two or more dimensions, e.g. cost vs. performance, etc., during the modeling and production phases of the application. Towards bridging such a gap, in [Gómez Sáez et al., 2014] and [Andrikopoulos et al., 2014a] we proposed a methodology and formal framework, respectively. Such approaches aim at allowing developers and operation engineers to distribute and redistribute their application components spanned among multiple Clouds to cope with changing business and operational requirements, and fluctuating

⁶AWS EC2: <http://aws.amazon.com/ec2/>

⁷AWS RDS: <http://aws.amazon.com/rds/>

workloads.

The *Performance Aware Cloud (Re)Distribution Process* depicted in Figure 2 consists of several tasks: (i) modeling the application topology, (ii) enriching such topology with business and operational requirements, and the workload characteristics, which are then (iii) processed and analyzed to subsequently (iv) discover, construct, and evaluate alternative μ -topologies. The (v) deployment and production phase of the application assists in building the necessary knowledge to (vi) analyze the evolution of the application performance demands and workload behavior through monitoring techniques. The *Collaborative Loop* gears towards supporting the (re-)distribution of the application over time to rapidly react to changing requirements and fluctuating workloads. This research paper provides the conceptual and tooling support towards supporting the *Modeling* and *Enrichment* tasks in Figure 2.

3 PERFORMANCE-AWARE MODELING & ENRICHMENT OF CLOUD APPLICATIONS

This section presents two fundamental aspects that must be taken into consideration for achieving an agile (re)distribution of Cloud applications spanning multiple Clouds: (i) the development of a life cycle for selecting and configuring Cloud resources to satisfy application business and operational requirements, and (ii) the derivation of the necessary foundations in the *Modeling* and *Enrichment* tasks depicted of the *Performance Aware Cloud Application (Re)Distribution Process* to support the different phases of the life cycle.

3.1 Life Cycle

The specification and analysis of the application business and operational performance require to consider two aspects: (i) the difference between the required and offered performance, and (ii) the evolution of the application workload behavior. According to several investigations [Bahga and Madiseti, 2011, Gmach et al., 2007, John et al., 1998, Mian et al., 2013, Watson et al., 2010], two approaches can be derived for designing and provisioning adaptable Cloud applications w.r.t. changing business and operational requirements, and

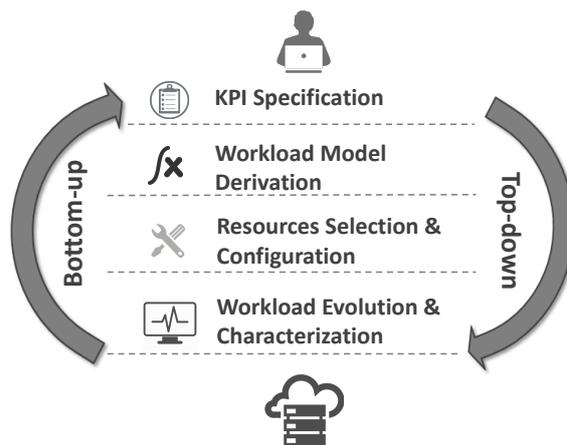


Figure 3: Application (Re)Distribution Life Cycle

fluctuating workloads: *top-down* and *bottom-up*. The life cycle depicted in Figure 3 supports the (re)distribution of applications w.r.t. their business and operational requirements. A first phase consists of the *KPI Specification*, by means of defining and specifying the business and operational requirements. Together with the specification and analysis of the application workload in the *Workload Model Derivation* phase, the resources can be selected and configured in the *Resources Selection & Configuration* phase. However, the previous phases do not directly enable the analysis of the workload fluctuation. Towards such a goal, the *Workload Evolution & Characterization* phase allows to analyze the workload evolution during the application’s production phase, using, e.g. monitoring techniques.

The execution of the previous phases in the top-down approach empowers the allocation of resources to satisfy business and operational requirements. The *bottom-up* approach builds on the adaptation of resources and in the refinement of business and operational requirements. The bottom-up approach mainly builds towards deriving the optimal resource allocation and configuration w.r.t. the application performance [Mian et al., 2013]. In this work we build towards the consolidation of the *top-down* and *bottom-up* application workload analysis approaches over time in order to proactively satisfy application demands by dynamically (re-)adapting its topology.

3.2 KPI Requirements Specification

The specification of business and operational requirements typically relate to the application’s

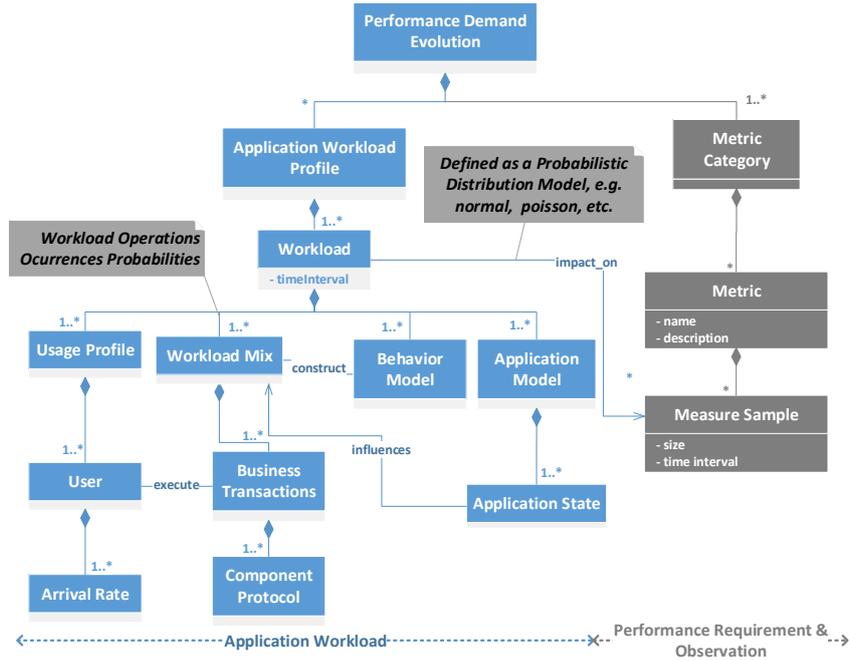


Figure 5: Workload Behavior Specification

the *Application (Re)Distribution Life Cycle* (see Figure 3).

The application’s *Workload Profile* consists of a set of *Workload* samples, each comprising its *Usage Profile*, its *Workload Mix*, and its *Behavioral Model*. The workload’s *Usage Profile* describes the evolution of the application’s end *Users* behavior, in terms of their *Arrival Rate* and the specification of concurrent or non-concurrent requests. Every *User* executes a set of *Business Transactions* sent over a specific transport protocol supported by the application’s *Component Protocol*. The set of transactions performed on the application are distributed within a *Workload Mix*, based on, e.g. popularity, probability of occurrence, etc., each having an impact on every *Application State* of the *Application Model*. For example, transitions between *Application States* originate in the execution of the user’s requests, e.g. log-in operations, Wiki page search, etc. The distribution of requests within the workload mix and the distribution of users over time define a *Behavioral Model*, i.e. a statistical model representing the behavioral characteristics of users and requests, which can be leveraged in order to drive statistical analyses, categorizations, or estimations.

3.4 Cloud Resources Selection & Reconfiguration

In this section we investigate how Cloud application topology models can be enhanced with the previously depicted knowledge. Since Cloud application topologies describe the set of components, services, and the relationships among them, the enrichment support must take into consideration the different levels where Cloud application topology models can be enriched. The remaining of this section outlines in a fined granular manner such possibilities.

Due to the generic nature of GENTL among different Cloud application topology languages, we use it as the basis for analyzing the modeling and enrichment points of Cloud application topology models [Andrikopoulos et al., 2014b] (see Figure 6). KPI requirements and workload behavioral characteristics can be fundamentally specified in two granular ways. A fined granular description consists of decomposing and describing the performance requirements and workload characteristics, respectively, e.g. on the topology *Component* or *Relationship* levels. For instance, the usage of different storage services to store application data, such as AWS S3⁸ or AWS RDS, may require fined granular description of the workload operations

⁸AWS S3: <http://aws.amazon.com/s3>

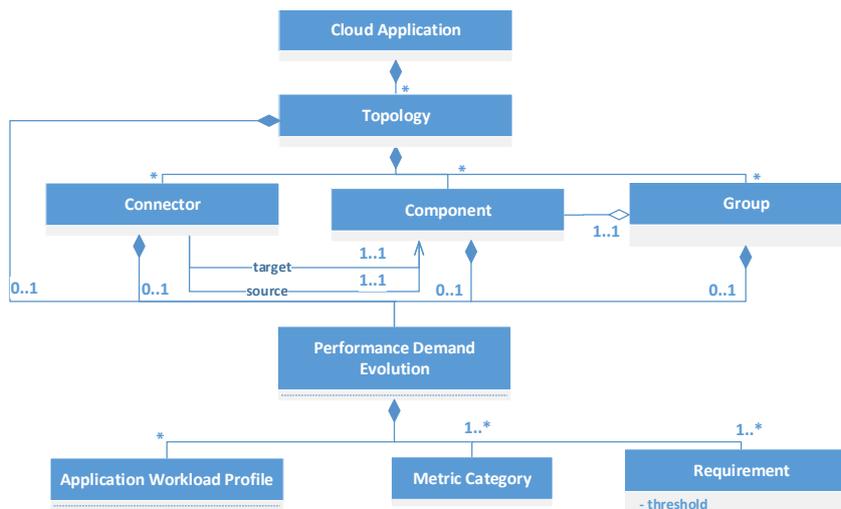


Figure 6: Application Topology Enrichment with Performance and Workload Models

for each topology *Component* independently, due to the different nature of such data services. *Relations* among the topology components depicted as *Connectors* have a significant impact in the overall performance of applications, as they are usually impacted by the network configuration and characteristics. The specification of performance information in sub-topologies enables to group reusable Cloud components and services with common KPI requirements and workload behavioral characteristics.

The enhancement of Cloud application topologies with KPI requirements and workload information can be leveraged during the design, provisioning, and production phases of the application for predicting and analyzing the performance of Cloud offerings. Such information can be leveraged in future decision making tasks towards assisting application developers to select, configure, and dynamically adapt Cloud resources.

4 ARCHITECTURE & IMPLEMENTATION

In the following we discuss the tooling support to support Cloud application developers in the *Modeling* and *Enrichment* tasks of performance-aware Cloud application topologies. Due to the high adoption of the TOSCA standard in both the industry and research domain, we build the technological support atop of the TOSCA specification and its corresponding modeling environment OpenTOSCA Winery [Kopp et al., 2013].

PERFinery - an OpenTOSCA Winery Extension PERFinery⁹ is a TOSCA-based modeling environment geared towards the enrichment of TOSCA-based Cloud application topologies with evolutionary performance requirements and workload models.

The specification of non-functional requirements of Cloud applications is supported in TOSCA by attaching custom policies to the application topology, typically conforming to the Policy4TOSCA definition [Waizenegger et al., 2013]. Policy4TOSCA enables the definition of *Policy Types* and *Policy Templates* comprising actions which must be performed at concrete phases of the application life cycle and on specific layers of the application. However, Policy4TOSCA lacks of tooling support and does not capture evolving performance information, such as the influence of workloads on the fulfillment of KPI requirements. The topology enrichment support in this work empowers the current TOSCA policy definition support by enabling the graphical creation of custom *Policies* comprising the different measurable and analyzable application requirements.

Figure 7 depicts the architecture of PERFinery, and highlights the components that have been extended in Winery. The *Topology Elements Manager*, *Topology and Plan Modeler*, and the *Repositories* are the major components (see Figure 7). The *Topology Elements Manager* enables the administration and management of reusable artifacts among multiple topology templates, e.g. *Node Types*, *Relationship Types*, or *Deployment Arti-*

⁹PERFinery Modeling Environment: <http://www.iaas.uni-stuttgart.de/PERFinery/>

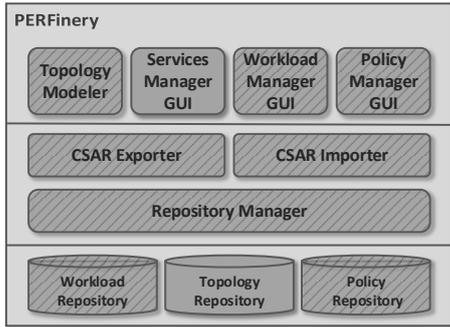


Figure 7: PERFinery Modeling Environment Architecture (extended from [Kopp et al., 2013])

facts. The *Topology Modeler* provides the modeling artifacts towards designing and visualizing Cloud application topologies. PERFinery comprises repositories for storing Cloud application topology models and reusable artifacts. The modeling elements are provided through the *Topology Modeler* and *Element Manager* client-side GUIs developed using Java Web technologies and HTML5 (see Figure 7). Moreover, a REST interface is also offered atop of the *Topology Repository* for persisting and retrieving TOSCA artifacts, e.g. CSAR packages. The generated TOSCA and Policy4TOSCA templates, and workload specifications, as well as the corresponding CSAR packages, are persisted in separate repositories. The persistence of workload models is driven and persisted in an independent *Workload Repository*. Generated workloads can be used towards enriching modeled application topologies with their behavioral characteristics, e.g. user arrival rate, transactions’ mix and distribution of requests, etc.

Application topology and workload models can be created, viewed, and modified by navigating through the repository and the different sections that PERFinery offers. For instance, Figure 8 depicts the topology model created for the MediaWiki application used for the motivation of this work, which is subsequently enhanced with performance information.

5 EVALUATION

We evaluate our approach using the MediaWiki (Wikipedia) application and its realistic workload provided in [Urđaneta et al., 2009]. The MediaWiki front-end tier encapsulates the presentation and business logic layers, while its back-end provides its persistency mechanisms. We used the

Table 1: Workload Characteristics

Operation Type	#Requests	Ratio
Read	199925	99.96%
Write	75	0.04%
Image Retrieval	8971	4.49%
Skins Retrieval	66926	33.46%
Wiki Pages Retrieval	106347	53.17%
Others	7634	3.81%

workload provided in Wikibench¹⁰ for describing the workload. Figure 8 shows the view for building custom performance *Policy Profiles*.

W.r.t. the workload specification, a first step consisted of sampling 200K HTTP requests of the original WikiBench workload describing the characteristics depicted in Table 1. However, such a workload sample is not distributed among the different users. For this purpose, the workload sample is referenced in PERFinery together with the specification of its behavioral characteristics, as depicted in Figure 9, respectively. More specifically, the workload model is specified in CSV format and comprises multiple users arriving at different time intervals and executing a set of requests mixes defined in the workload sample.

The extensions realized in Winery serve as the basis for enriching TOSCA topologies with performance information. More specifically, it provides Cloud application developers with the means to graphically include QoS information as TOSCA policies and workload descriptors.

6 RELATED WORK

Most analytical approaches and frameworks in the literature focus on combining operational expenses analysis with one or more dimensions pertaining to performance as part of their mission to support Cloud application developers.

DADL is presented in [Mirkovic et al., 2010] as a language to describe the architecture, behavior and needs of a distributed application to be deployed in the Cloud, as well as describing available Cloud offerings for matching purposes. Similarly, in [Antonescu et al., 2012], the authors propose a policy and action-based approach that matches and dynamically adapts the allocation of infrastructure resources to an application topology in order to ensure SLAs. The Cloud-Mig [Frey and Hasselbring, 2011] approach builds

¹⁰Wikibench Project: <http://www.wikibench.eu/>

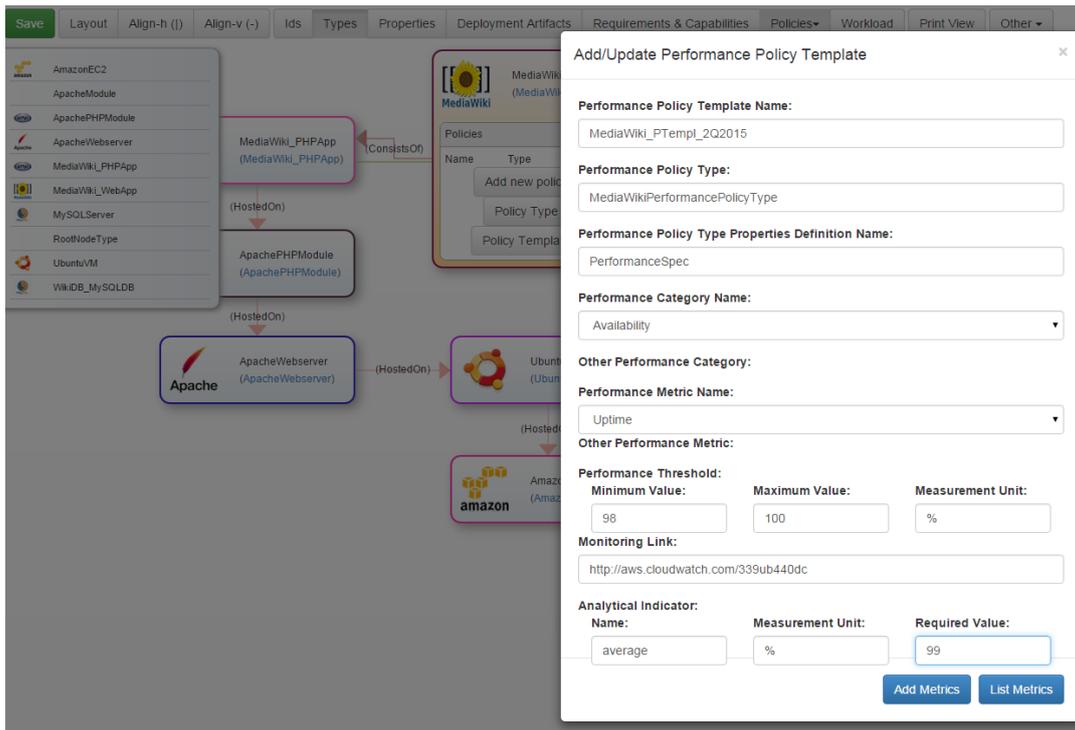


Figure 8: PERFinery Modeler — Specification of Performance Requirements

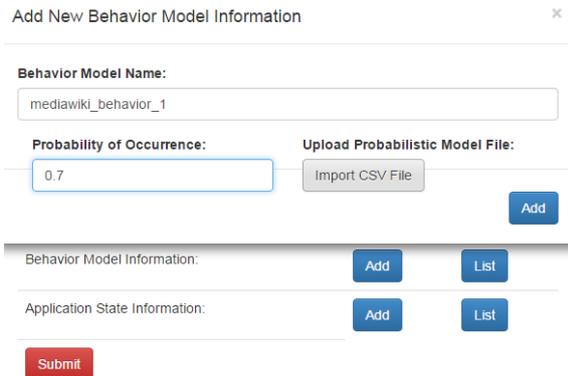


Figure 9: PERFinery Modeler — Workload Behavioral Model Specification

on an initial topology and utilization model of the application that is mapped or adapted through model transformation in order to optimize the distribution of the application across Cloud offerings. The MODACloud [di Nitto et al., 2013] and CloudML [Brandtzæg et al., 2012] projects focus on providing a multi-dimensional early design support of applications by applying model transformation techniques and code generation for multi-cloud applications. Further multi-cloud applica-

tion distribution approaches are targeted by the SeaClouds EU Project¹¹, by means of providing a *Cloud Service Orchestrator* capable of provisioning and managing application components spanned among multiple Cloud environments [Brogi et al., 2014]. The CACTOS EU Project¹² is possibly the closest approach to the fundamentals developed as part of this work. The CACTOS environment aims at fitting resources within a provider for diverse application workloads. However, all previous approaches introduce complex tasks, e.g. creation of simulation models, which often require the intervention of domain experts, causing an overhead in the development and (re)deployment tasks of applications. Moreover, the relationship of topology models with varying application workloads is not yet fully covered.

Further optimization of distribution of applications like the Palladio-based approach discussed in [Miglierina et al., 2013] aims at optimizing for availability and operational expenses. Moreover, optimization mechanisms are based on simulation techniques requiring the definition of their corresponding models. The MOCCA framework [Ley-

¹¹SeaClouds EU Project: <http://www.seaclouds-project.eu/project.html>

¹²Cactos EU Project: <http://www.cactosfp7.eu/>

mann et al., 2011] deals with the same problem by introducing variability points in the application topology in order to cope with possible alternative deployment topologies. CMotion [Binz et al., 2011] uses an approach based on topology modeling, generation of alternative topologies, and consequent evaluation and selection of one of those alternatives based on multiple criteria. The work in [Andrikopoulos et al., 2014a] uses the notion of typed graphs for similar purposes and proposes a formal framework to support this effort. In a similar approach, MADCAT [Inzinger et al., 2014] incorporates to the topology model scalability elements, and refines the topology model from a high-level application topology to a ready for deployment one.

The vision this paper pursues aims at leveraging existing non-functional requirement specification approaches, such as the ones previously discussed, towards providing the conceptual foundations to specify the performance aspects and analyze the impact of fluctuating workloads for various Cloud application distribution and configuration alternatives in a simplified manner by enriching Cloud application topology models.

7 CONCLUSIONS AND FUTURE WORK

The heterogeneity of available Cloud services has become a challenge for application developers when considering a rapid and efficient selection and configuration of Cloud offerings. Application components can be distributed or replaced by different Cloud services, potentially spanned among multiple Clouds. Focusing on the business and operational performance of Cloud applications, there currently exists a lack of modeling and decision making support for capturing, analyzing, and assessing when migrating, configuring, and utilizing different Cloud services under fluctuating workloads and intermittent QoS levels.

The assessment of, and guidance in the distribution of multi-Cloud applications is the core motivation behind this work. We build towards enabling the efficient (re-)distribution of Cloud applications by means of selecting and configuring Cloud offerings to cope with fluctuating workloads and evolving performance demands. The first step towards such a goal is covered in this work by providing the means for the enhancement of application deployment models with performance information and workload behavioral character-

istics. This work tackles the various phases of our proposed application performance-aware application (re)distribution life cycle by establishing the foundations and tooling support for enhancing Cloud application topology models with evolving performance requirements and workload models. For this purpose, we propose a conceptual model aimed at enriching Cloud application topologies with evolving performance requirements and workload behavioral characteristics, which can be used as the basis for capturing and analyzing the performance and workload evolution when distributing the application components among different Cloud services. The technological support developed in this work builds upon the TOSCA and Policy4TOSCA specifications, and its corresponding tooling support is built atop the Winery modeling environment of the OpenTOSCA ecosystem, which is then evaluated using the well known MediaWiki application and its realistic workload.

Future investigations are aligned to the development process of the tool chain depicted in [Gómez Sáez et al., 2014], and to reuse or realize, when deemed necessary, the concepts and instrumentation support to gather, aggregate, and automate the analysis and application (re-)distribution assessment tasks.

ACKNOWLEDGEMENTS

This work is partially funded by the FP7 EU-FET project 600792 ALLOW Ensembles and the German 610872 DFG Project SitOPT.

REFERENCES

- [Andrikopoulos et al., 2013] Andrikopoulos, V., Binz, T., Leymann, F., and Strauch, S. (2013). How to Adapt Applications for the Cloud Environment. *Computing*, 95(6):493–535.
- [Andrikopoulos et al., 2014a] Andrikopoulos, V., Gómez Sáez, S., Leymann, F., and Wettinger, J. (2014a). Optimal Distribution of Applications in the Cloud. In Jarke, M., Mylopoulos, J., and Quix, C., editors, *Proceedings of CAiSE'14*, pages 75–90. Springer.
- [Andrikopoulos et al., 2014b] Andrikopoulos, V., Reuter, A., Gómez Sáez, Santiago, and Leymann, F. (2014b). A GENTL Approach for Cloud Application Topologies. In *Proceedings of ESOC'14*, pages 148–159. Springer.
- [Antonescu et al., 2012] Antonescu, A.-F., Robinson, P., and Braun, T. (2012). Dynamic topology or-

- chestration for distributed cloud-based applications. In *Proceedings of NCCA'12*, pages 116–123.
- [Bahga and Madiseti, 2011] Bahga, A. and Madiseti, V. K. (2011). Synthetic Workload Generation for Cloud Computing Applications. *Journal of Software Engineering and Applications*, 4:396–410.
- [Binz et al., 2011] Binz, T., Leymann, F., and Schumm, D. (2011). CMotion: A Framework for Migration of Applications into and between Clouds. In *Proceedings of SOCA'11*, pages 1–4. IEEE Computer Society.
- [Brandtzæg et al., 2012] Brandtzæg, E., Mohagheghi, P., and Mosser, S. (2012). Towards a domain-specific language to deploy applications in the clouds. In *Proceedings of CLOUD COMPUTING'12*, pages 213–218. IARIA.
- [Brogi et al., 2014] Brogi, A., Ibrahim, A., Soldani, J., Carrasco, J., Cubo, J., Pimentel, E., and D'Andria, F. (2014). Seaclouds: a european project on seamless management of multi-cloud applications. *ACM SIGSOFT Software Engineering Notes*, 39(1):1–4.
- [di Nitto et al., 2013] di Nitto, E., Silva, M. A. A. d., Ardagna, D., Casale, G., Craciun, C. D., Ferry, N., Munteș, V., and Solberg, A. (2013). Supporting the development and operation of multi-cloud applications: The modacLOUDs approach. In *Proceedings of SYNASC'13*, pages 417–423. IEEE.
- [Frey and Hasselbring, 2011] Frey, S. and Hasselbring, W. (2011). The cloudmig approach: Model-based migration of software systems to cloud-optimized applications. *International Journal on Advances in Software*, 4(3 and 4):342–353.
- [Gmach et al., 2007] Gmach, D., Rolia, J., Cherkasova, L., and Kemper, A. (2007). Workload Analysis and Demand Prediction of Enterprise Data Center Applications. In *Proceedings of IISWC'07*, pages 171–180.
- [Gómez Sáez, 2014] Gómez Sáez, S. (2014). Design Support for Performance-aware Cloud Application (Re-)Distribution. In *Proceedings of ESOC'2014*, pages 6–11. Jenaer Schriften zur Mathematik und Informatik.
- [Gómez Sáez et al., 2015] Gómez Sáez, S., Andrikopoulos, V., Hahn, M., Karastoyanova, D., Leymann, F., Skouradaki, M., and Vukojevic-Haupt, K. (2015). Performance and Cost Evaluation for the Migration of a Scientific Workflow Infrastructure to the Cloud. In *Proceedings CLOSER'2015*, pages 352–361. SciTePress.
- [Gómez Sáez et al., 2014] Gómez Sáez, S., Andrikopoulos, V., Leymann, F., and Strauch, S. (2014). Design Support for Performance Aware Dynamic Application (Re-)Distribution in the Cloud. *IEEE Transactions on Services Computing*, 8(2):225–239.
- [Inzinger et al., 2014] Inzinger, C., Nastic, S., Sehic, S., Vögler, M., Li, F., and Dustdar, S. (2014). MADCAT A Methodology for Architecture and Deployment of Cloud Application Topologies. In *Proceedings of SOSE'14*. IEEE.
- [John et al., 1998] John, L. K., Vasudevan, P., and Sabarinathan, J. (1998). Workload Characterization: Motivation, Goals and Methodology. In *Proceedings of WWC'98*.
- [Kopp et al., 2013] Kopp, O., Binz, T., Breitenbücher, U., and Leymann, F. (2013). Winery - A Modeling Tool for TOSCA-based Cloud Applications. In *Proceedings of ICSSOC'13*, volume 8274 of *LNCS*, pages 700–704. Springer Berlin Heidelberg.
- [Leymann et al., 2011] Leymann, F., Fehling, C., Mietzner, R., Nowak, A., and Dustdar, S. (2011). Moving applications to the cloud: An approach based on application model enrichment. *International Journal of Cooperative Information Systems*, 20(03):307–356.
- [Mian et al., 2013] Mian, R., Martin, P., and Vazquez-Poletti, J. L. (2013). Provisioning Data Analytic Workloads in a Cloud. *FGCS*, 29:1452–1458.
- [Miglierina et al., 2013] Miglierina, M., Gibilisco, G., Ardagna, D., and Di Nitto, E. (2013). Model based control for multi-cloud applications. In *Proceedings of MiSE'13*, pages 37–43.
- [Mirkovic et al., 2010] Mirkovic, J., Faber, T., Hsieh, P., Malaiyandisamy, G., and Malaviya, R. (2010). DADL: Distributed Application Description Language. Technical Report ISI-TR-664, USC/ISI.
- [Urdaneta et al., 2009] Urdaneta, G., Pierre, G., and van Steen, M. (2009). Wikipedia workload analysis for decentralized hosting. *Elsevier Computer Networks*, 53(11):1830–1845.
- [Van Hoorn et al., 2008] Van Hoorn, A., Rohr, M., and Hasselbring, W. (2008). Generating probabilistic and intensity-varying workload for web-based software systems. In *Performance Evaluation: Metrics, Models and Benchmarks*, pages 124–143. Springer.
- [Waizenegger et al., 2013] Waizenegger, T., Wieland, M., Binz, T., Breitenbücher, U., Haupt, F., Kopp, O., Leymann, F., Mitschang, B., Nowak, A., and Wagner, S. (2013). Policy4TOSCA: A Policy-Aware Cloud Service Provisioning Approach to Enable Secure Cloud Computing. In *OTM'13*.
- [Watson et al., 2010] Watson, B. J., Marwah, M., Gmach, D., Chen, Y., Arlitt, M., and Wang, Z. (2010). Probabilistic Performance Modeling of Virtualized Resource Allocation. In *Proceedings of ICAC'10*.